

12-20-99

PATENT APPLICATION TRANSMITTAL LETTER
(Large Entity)

A

Docket No.
11478BAUS01U (NORT-0030-US)

TO THE ASSISTANT COMMISSIONER FOR PATENTS

12/17/99

jc583 U.S. PTO
12/17/99

Submitted herewith for filing under 35 U.S.C. 111 and 37 C.F.R. 1.53 is the patent application of:
Lewis T. Donzis and Earnest E. Hughes

For: **ROUTING DATA TO ONE OR MORE ENTITIES IN A NETWORK**

Enclosed are:

- ☒ Certificate of Mailing with Express Mail Mailing Label No. **EL515089325US**
- ☒ 9 sheets of drawings.
- ☐ A certified copy of a application.
- ☒ Declaration ☒ Signed. ☐ Unsigned.
- ☒ Power of Attorney
- ☐ Information Disclosure Statement
- ☐ Preliminary Amendment
- ☒ Other: **Recordation Form Cover Sheet and Assignment**

CLAIMS AS FILED

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	34	- 20 =	14	x \$18.00	\$252.00
Indep. Claims	7	- 3 =	4	x \$78.00	\$312.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
TOTAL FILING FEE					\$1,324.00

- ☒ A check in the amount of **\$1,324.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **20-1504** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

Dated:

12/17/99

Signature

Dan C. Hu, Reg. No. 40,025
Trop, Pruner, Hu & Miles, P.C.
8554 Katy Freeway, Suite 100
Houston, TX 77024
(713) 468-8880 [Ph]
(713) 468-8883 [Fax]

cc:

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: ROUTING DATA TO ONE OR MORE
ENTITIES IN A NETWORK

APPLICANTS: LEWIS T. DONZIS AND EARNEST E.
HUGHES

Express Mail No.: EL515089325US
Date: December 17, 1999

Prepared by: Trop, Pruner, Hu & Miles, P.C.
8554 Katy Freeway, Ste. 100, Houston, TX 77024
713/468-8880 [Office], 713/468-8883 [Fax]

ROUTING DATA TO ONE OR MORE ENTITIES IN A NETWORKBACKGROUND

The invention relates to routing data to one or more entities in a network.

Communications over data networks may include electronic mail, file access,
5 web browsing, electronic commerce transactions, telephonic communications, video conferencing, and so forth. Networks may include private networks, such as local area networks (LANs) or wide area networks (WANs), and public networks, such as the Internet. Private networks are networks in which access is restricted to authorized users, while public networks are generally accessible.

10 To prevent unauthorized access of data communicated over either public or private data networks, various security protocols have been implemented to allow for encryption of data and authentication of sources of data. One such security protocol is Internet Protocol Security (IPSec), as described in part by Request for Comments (RFC) 2401, entitled "Security Architecture for the Internet Protocol," dated
15 November 1998. Using security protocols, secure communications (such as those that are part of electronic commerce transactions, file access, and so forth) may be possible over data networks. For example, a web server may be set up by a business that offers goods or services for sale over public networks. A secure communications session may be established between a user and the web server over the public
20 networks so the user can securely provide his or her private information.

Another application of secure communications is in virtual private networks (VPNs). In some conventional systems, access to private networks from distant locations (such as from branch offices or by remote users) is performed by direct dial-up or by dedicated point-to-point lines to provide secure links. However, direct dial-
25 up and dedicated point-to-point lines are typically more expensive than the alternative of accessing the private network over a public network such as the Internet. To enable secure communications over a public network to one or more private networks, VPNs may be used. A VPN includes a public network as the primary transport medium, with communications protected by a security protocol. By using a VPN, a
30 convenient and cost-effective mechanism is afforded users who desire to remotely access a private network.

Data networks may include Internet Protocol (IP) networks, in which routers may be used to route data packets to appropriate destinations based on addresses contained in the data packets. An IP packet typically includes a source address and a destination address to identify the source and destination of the packet. Different
 5 network entities are typically assigned different IP addresses.

However, in some arrangements, multiple entities in a network (particularly a network associated with home or small business users) may share a single IP address. This allows multiple nodes or entities in the network to share an inexpensive Internet access account and also makes network administration more convenient. Further,
 10 sharing of IP addresses by multiple nodes alleviates the problem of limited available IP addresses. To enable sharing of a common IP address, a router may include a network address translator (NAT). A NAT operates by modifying the headers of IP packets as they pass through the router so that packets leaving a router to a public network have a common IP address, regardless of which of plural entities in a local
 15 network originated the packets. Likewise, when packets are received from the public network by the router, addressed to the single common address, a router determines which of the plural entities in the local network the packet belongs to and modifies the destination address accordingly.

Conventionally, the address translation may be performed by using port
 20 numbers contained in the packets to uniquely identify entities in the local network sharing a common address. The port numbers may be those defined by the Transmission Control Protocol (TCP) or User Datagram Protocol (UDP), as examples. By associating a different port number with each of the plural entities in the network, the router can route a packet to the appropriate one of the entities even
 25 though a common IP address is used for all of the entities.

Although such many-to-one address translations may be performed for regular IP packets, it may not be possible if the packets are protected according to certain security protocols, such as IPsec. Under IPsec, an Internet Security Association and Key Management Protocol (ISAKMP) defines procedures and packet formats to
 30 establish, negotiate, and provide security services between various network entities. Once the desired security services have been negotiated between two entities, traffic may be carried in IP Encapsulating Security Payload (ESP) packets. In packets protected by ISAKMP and ESP, TCP or UDP ports may not be available to uniquely identify plural entities that are associated with a common IP address. Without the

ability to differentiate by TCP or UDP ports, a router with a NAT would be unable to identify the target entity in a network when it receives a packet protected by a security protocol (such as ISAKMP or ESP) that includes a shared destination IP address.

A need thus exists for a method and apparatus to allow for network address translation in communications protected by a security protocol.

SUMMARY

In general, according to one embodiment, a method of routing a data unit targeted to one of plural entities in a network includes receiving the data unit containing security information and address information. The address information is translated to an address of a target entity in the network based on the security information.

Some embodiments of the invention may include one or more of the following advantages. Security may be provided for communications with network entities that share a network address. The ability to share a network address among plural network entities may reduce costs by allowing nodes to share a single Internet access account and making network administration more convenient. Also, security may be provided in communications over public networks between remote locations in which at least one of the remote locations includes a network (such as one associated with a virtual private network) having entities that share a common network address.

Other features and advantages will become apparent from the following description, from the drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram an embodiment of a communications system capable of performing secured communications.

Fig. 2 is a flow diagram of a process in accordance with one embodiment of translating addresses in the messages communicated between a client system, a server system, and routers.

Figs. 3A and 3B illustrate messages according to an Encapsulating Security Payload (ESP) protocol and an Internet Security Association and Key Management Protocol (ISAKMP).

Fig. 4 illustrates contents of an ESP header.

Fig. 5 illustrates contents of an ISAKMP header.

Fig. 6 illustrates components in a router in accordance with one embodiment.

Figs. 7A-7D illustrate contents of an ISAKMP message during transmission and reception of the message.

5 Figs. 8A and 8B illustrate contents of an address translation table that contains fields for storing initiator and responder cookies that are part of ISAKMP messages exchanged between a client system and a server system in accordance with one embodiment.

Figs. 9A-9D illustrate contents of an ESP message during transmission and reception of the message in accordance with one embodiment.

10 Figs. 10A and 10B illustrate contents of an address translation table containing fields for storing ESP information in accordance with an embodiment.

DETAILED DESCRIPTION

15 In the following description, numerous details are set forth to provide an understanding of the present invention. However, it will be understood by those skilled in the art that the present invention may be practiced without these details and that numerous variations or modifications from the described embodiments may be possible.

20 Referring to Fig. 1, an example communications system 10 includes local networks 12 and 14, which may be private networks, and a public network 16 (such as the Internet) that interconnects the local networks 12 and 14. A “network” may refer to one or more communications networks, links, channels, or paths. A “private network” refers to a network that is protected against unauthorized general public access. Although reference is made to “private” and “public” networks in this
25 description, further embodiments may include networks without such designations.

The local network 12 may be coupled to multiple nodes, with 18 and 20 illustrated. The other local network 14 may also be coupled to multiple nodes, with nodes 22 and 24 illustrated. A router 26 coupled to the local network 12 and a router 28 coupled to the local network 14 are used to route data units over the public
30 network 16 to nodes tied to the local networks 12 and 14.

In one embodiment, the router 26 may include a network address translator (NAT) to allow the multiple nodes coupled to the local network 12 to share a common “outside” address, that is, the address visible to nodes outside the local network 12. This shared or common address is used by outside nodes (those nodes not coupled to

local network 12) to communicate with nodes coupled to the local network 12.

Within the local network 12, however, each of the nodes may be assigned unique local network addresses. Thus, for example, node 18 is assigned local network address A, node 20 is assigned local network address B, and so forth. When one of the nodes 18 and 20 sends a data unit (which may be a message, packet, or some other unit of data) to the router 26 for routing over the public network 16, the router 26 converts the local network address (A or B), which is the source address, to the shared or common outside address (e.g., address X).

A data unit targeted from outside the local network 12 to one of the local nodes 18 and 20 as received by the router 26 contains the destination address X (the shared or common address). The NAT 27 in the router 26 converts the destination address X to the appropriate one of local network address A, B, or other address, depending on which of the nodes tied to the local node 12 is the destination.

The network architecture shown in Fig. 1 may be a virtual private network (VPN) architecture, in which the local network 12 is a remote network and the local network 14 is a “home” or central network. For example, the remote network may be located in a branch office and the home network may be located at corporate headquarters. The VPN uses the public network 16 as the primary transport medium over which communications can occur between the local networks 12 and 14. The communications may be safeguarded by employing a security protocol to encrypt data and authenticate sources of data. In a further embodiment, the architecture of Fig. 1 or some variation of it may be employed for another type of network (instead of a VPN).

Conventionally, the NAT 27 in the router 26 uses port numbers specified in a data unit to perform the address translation. Such port numbers may be according to the Transmission Control Protocol (TCP) or the User Datagram Protocol (UDP). TCP is described in Request for Comments (RFC) 793, entitled “Transmission Control Protocol,” dated September 1981; and UDP is described in RFC 768, entitled “User Datagram Protocol,” dated August 1980. In one embodiment, the data units may be packets or datagrams according to the Internet Protocol (IP), as described in RFC 791, entitled “Internet Protocol,” dated September 1981. Other versions of IP, such as IPv6, or other standards may be used in further embodiments for communications over various data networks. IPv6 is described in RFC 2460, entitled “Internet Protocol, Version 6 (IPv6) Specification,” dated December 1998.

With certain security protocols, however, such as the IP security (IPSec) protocol, the TCP or UDP ports may not be available for use in performing the desired address translation. The IPSec protocol is described in part by RFC 2401, entitled "Security Architecture for the Internet Protocol," dated November 1998.

5 Under IPSec, an Internet Security Association and Key Management Protocol (ISAKMP) defines procedures and packet formats to establish, negotiate, and provide security services between various network entities. Once the desired security services have been negotiated between two entities, traffic may be carried in IP Encapsulating Security Payload (ESP) packets. ISAKMP is described in RFC 2408, entitled
10 "Internet Security Association and Key Management Protocol (ISAKMP)," dated November 1998; and ESP is described in RFC 2406, entitled "IP Encapsulating Security Payload (ESP)," dated November 1998.

However, with ISAKMP or ESP, TCP or UDP ports are not available to uniquely identify the multiple nodes coupled to the local network 12. In accordance
15 with some embodiments, instead of using UDP or TCP ports, the NAT 27 in the router 26 uses predetermined security information in ISAKMP or ESP data units to perform address translation. In one arrangement, the security information may be stored in address translation tables that are accessible by the NAT 27 for performing address translations. When a data unit is received by the router 26 over the public
20 network 16, the NAT 27 matches address and security information in the data unit to an address translation table to determine the local network address of the destination node in the local network 12. Once a match is found, the NAT 27 can convert the shared or common address X to the local network address.

Referring to Fig. 3A, an IP packet 100 that includes ESP information is
25 illustrated. The IP packet 100 includes an IP header 102, an ESP header 104, and a protected payload section 106, which may include the original IP header, TCP or UDP port numbers, and the data payload. The IP header 102 includes a source address, a destination address, and a protocol identifier to indicate the next level protocol that is used (e.g., TCP, UDP, or ESP). The IP packet 100 may include
30 additional ESP-related information after the payload section 106. Since the payload section 106 is protected by encryption, the UDP or TCP port information is inaccessible by the NAT 27 for purposes of address translation. In accordance with some embodiments, instead of using the TCP or UDP information, predetermined security information in the ESP header 104 is used.

Referring to Fig. 3B, an IP packet 110 that includes ISAKMP information is illustrated. The IP packet 110 includes an IP header 112, a UDP port field 114, an ISAKMP header 116, and other information. The UDP port field 114 may include a source port and a destination port. However, according to a version of ISAKMP, the source and destination ports are assigned port 500. As a result, the NAT 27 in the router 26 is unable to use the UDP port information to differentiate between multiple nodes coupled to the local network 12 that share a common address. In accordance with some embodiments, predetermined security information in the ISAKMP header 116 is used instead to perform address translation.

For purposes of the following description, the nodes coupled to the local network 12 are referred to as client nodes, and the node (22) coupled to the local network 14 is referred to as a server node. In one example arrangement, the client nodes in the local network 12 may be VPN nodes that are capable of communicating with a node (server) in the home network 14. However, the client and server labels may be interchangeable or omitted in other arrangements.

Referring to Fig. 2, an example communications session is established between the client node 18 (assigned local network address A) and the server node 22 (assigned address Y). The client node 18 may first send a message to the router 26 (associated with address X) that is targeted for the server node 22 in the local network 14. The message may be an IP packet that includes the source address A, destination address Y, and ESP or ISAKMP information. When the router 26 receives the message, the NAT 27 translates the client address A to the common address X (at 202). Next, if one does not already exist, an address translation table for translating between address A and X may be created (at 204) for use by the NAT 27 to perform address translation. The address translation table may include the source address A, the destination address Y of the server node 22 (the destination), and predetermined security information in the message to provide a pattern that can be matched to information in a received message to perform address translation.

The router 26 next forwards the message, which now contains the source address X instead of A to the router 28 over the public network 16. When the router 28 receives the message, it routes the message to the destination specified in the message, which in this example is the server node 22.

The message from the client node 18 to the server node 22 may be one which seeks a response (such as an acknowledge message or other message) from the server

node 22. If so, the server node 22 may generate a message that is sent with a source address Y (of the server node 22) and a destination address X (of the router 26). The message further includes security information according to ESP or ISAKMP. When the router 28 receives the message from the server node 22, it forwards the message to the router 26 based on the destination address X.

When the router 26 receives the message originated by the server node 22, the NAT 27 retrieves (at 206) the address and security information that is contained in the message. The NAT 27 then determines (at 208) if this is the first time that a message from the server node 22 has been received with the source address Y and associated security information. If so, the address translation table is updated (at 210) with further information for subsequent use by the NAT 27. The source address and security information are then matched (at 212) to information in the address translation table to translate the destination address X to the address A associated with the client node 18. After translation of the destination address, the message is routed to the client node 18. The address translation table may be used in subsequent communications between the client node 18 and server node 22.

Referring to Figs. 4 and 5, the predetermined security information used by the NAT 27 for address translation is described. As shown in Fig. 4, an ESP header 104 includes a security parameters index (SPI) field, which is an arbitrary value (containing a random number) that, in combination with the destination IP address and security protocol (ESP), uniquely identifies security services (referred to as a “security association”) to be performed on the associated packet. In one example, the SPI field may be a 32-bit value, although the SPI field may have other lengths in further embodiments. The remaining fields in the ESP header 114 include a sequence number field, a payload data section, padding, and other information as defined by the ESP protocol.

In accordance with an embodiment of the invention, the SPI value is used by the NAT 27 to perform address translation. The SPI is ordinarily selected by a receiving or destination system upon establishment of a security association (SA). When an SA is initially established, one side assumes the role of initiator and the other the role of responder. An initiator can propose one or more security policies to the responder. The responder can then select one or the proposed security services offered by the initiator. Different SPIs may be used in communications sessions

between a pair of nodes depending on which is the source and which is the destination.

Referring to Fig. 5, an ISAKMP header 116 includes an initiator cookie and a responder cookie as well as other information as defined by ISAKMP. The initiator and responder cookies are used to identify ISAKMP security associations. The ISAKMP security associations are used during negotiation between the initiator and responder to protect negotiation traffic between the two entities. For packets containing ISAKMP security information, the initiator and responder cookies are used by the NAT 27 to perform address translation for the packets. The initiator and responder cookies may also contain random numbers.

Use of random numbers in the SPI or initiator and responder cookies makes it highly likely that the SPI or cookies are unique. This allows the NAT 27 to reliably translate the common address X of a received packet to the local network address of the target node based on the security information.

Referring to Fig. 6, the components of the router 26 are illustrated in greater detail. The router 26 includes a first network interface 300 that communicates with the local network 12 and a second network interface 302 that communicates with the public network 16. Each of the network interfaces 300 and 302 is associated with a driver 304 and 306, respectively. Above the driver layer may be a network communication stack that includes an IP layer 308 as well as TCP, UDP, ESP, and/or ISAKMP layers 310. Packets received from the local network 12 or public network 16 are sent up through the driver, IP, and TCP, UDP, ESP, and/or ISAKMP layers to a router application 312, which performs routing of the packets based on the source and destination addresses in the packets. In addition, the NAT 27 cooperates with the router application 312 to translate the source or destination address of each packet (depending on whether the packet is outbound from or inbound to the local network 12).

The router application 312, NAT 27, network stack layers, drivers, and other software routines or modules in the router 26 may be executable on a control unit 320. Data and instructions associated with the software routines may be stored in a storage unit 322. Other routers may have similar or modified arrangements as the arrangement of the router 26 shown in Fig. 6.

Referring to Figs. 7A-7D, the values of various fields in the IP packet 110 (Fig. 3B) containing ISAKMP information are illustrated. The fields include the

source and destination addresses, source and destination UDP ports, and the initiator and responder cookies. In Fig. 7A, the packet 110 sent from the client node 18 to the router 26 contains a source address A, a destination address Y, source and destination ports 500 (as required by a version of ISAKMP), an initiator cookie having a value IC, and a responder cookie having a null or unspecified value. The responder cookie is unknown at this point. Upon receipt of the message, the NAT 27 in the router 26 converts the source address A to the shared address X, as illustrated in Fig. 7B.

Referring further to Fig. 8A, an address translation table 400 may be created by the NAT 27. The address translation table 400 is used by the NAT 27 to translate a destination address in a message targeted for the client node 18. In one example arrangement, the table 400 includes two columns, a source column and a destination column. The table further includes an outbound section 402 and an inbound section 404. The outbound section 402 tracks the translation of the source address in an outbound message, while the inbound section 404 tracks the translation of the destination address in an inbound message.

As shown in Fig. 8A, the outbound section 402 includes a row 406 storing address and security information associated with a message from the client node 18 to the router 26. The outbound section 402 also includes a row 408 that includes the translated address information and security information in the outbound message. In the row 406, the source address A and associated initiator cookie IC value may be stored in the source column, while the destination address Y is stored in the destination column. In the row 408, the translated source address X and initiator cookie value IC are stored in the source column and the destination address Y is stored in the destination column. The responder cookie value is not included in the table 400 as shown in Fig. 8A because the responder cookie value is not known at this time.

The inbound section 404 may also be partially filled in at this time, with a row 410 containing the source address Y in the source column and the destination address X and initiator cookie IC in the destination column. A row 412 contains the source address Y and the translated destination address A and initiator cookie IC. It is noted that Fig. 8A illustrates one example of an address translation table, with other arrangements of the table being possible in further embodiments. Any arrangement of the address translation table in which a pattern containing address and security

information may be matched to corresponding information in a received message may be used in such further embodiments.

As shown in Fig. 7C, when the server node 22 sends a message targeted for the client node 18, the packet 110 contains a source address Y and a destination address X, source and destination ports with port number 500, an initiator cookie IC and a responder cookie RC. Upon receipt of the message by the router 26, the NAT 27 matches the address Y and initiator and responder cookies IC and RC to the translation table 400. Since the example shows the first communications session between the client node 18 and the server node 22, the table 400 is not completely filled in. The NAT 27 attempts to obtain an exact match of the address and security information in a received message to an address translation table. If an exact match is not found, then the NAT 27 finds a partially filled address translation table, such as the one shown in Fig. 8A. The partially filled address translation table 400 can then be updated with the remaining information, which in this example is the responder cookie RC. The complete address translation table 400 is shown in Fig. 8B. The address translation table 400 may then be subsequently accessed by the NAT 27 to match address and security information in a received packet to convert the destination address X to the local network address of the target node (e.g., network address A of the client node 18), as shown in Fig. 7D.

The pattern in the address translation table 400 that the NAT 27 uses to match address and security information includes the common address X, initiator cookie IC, and responder cookie RC. From the matched pattern, the target network address A can be determined.

Referring to Figs. 9A-9D, the processing of a packet 100 containing ESP information by the NAT 27 is illustrated. As shown in Fig. 9A, the client node 18 may send the router 26 a packet 100 containing a source address A, a destination address Y, and an SPI value Sy (which is the SPI value of the destination server node 22). Upon receipt of the packet 100 by the router 26, the NAT 27 converts the source address A to X (as shown in Fig. 9B) and sends the message on to the destination server node 22.

Referring further to Fig. 10A, an address translation table 500 may be created (if this is the first session between client node 18 and server node 22) that includes a source column and a destination column and an outbound section 502 and inbound section 504. After receiving the packet 100 from the client node 18, the NAT 27 can

fill in the entries in the table 500 that the NAT 27 is aware of. Thus, in the first row 506 of the outbound section 502, the source column is filled in with the address A and the destination column is filled in with the address Y of the destination server node 22 and its associated SPI value S_y . Upon translation of the source address by the NAT 27, the next row 508 of the outbound section 502 is filled in with the address X in the source column and the address Y and SPI value S_y in the destination column. The inbound section 504 including rows 510 and 512 may also be filled in with the known information. The SPI value of the client node 18 is not known at this time, so a null or zero value may be used in rows 510 and 512 as a place holder.

Referring to Figs. 9C and 9D, a message communicated back from the server node 22 to the router 26, and targeted to the client node 18, contains a source address Y, destination address X, and an SPI value S_a (the SPI value associated with the client node 18). Upon receipt of the packet 100 in Fig. 9C, the NAT 27 attempts to match the information contained in the packet 100 with an address translation table.

However, if this is the first communications session between the client node 18 and the server node 22, the address translation table 500 is not completely filled in. To complete the address translation table 500, the NAT 27 matches the source address Y and destination address X to information in the partially filled address translation table 500. The NAT 27 then fills the SPI value S_a into the destination column in rows 510 and 512 (Fig. 10B). Using the new contents of the address translation table 500, the NAT 27 then converts the destination address X (Fig. 9C) to the local network address A of the client node 18 (Fig. 9D).

The NAT 27 may specify some amount of time that the address translation tables (e.g., 400 or 500) are valid. Depending on the type of communications that may occur between nodes coupled to the local network 12 and nodes coupled to the local network 14, such a time period may be variable.

Thus, a method and apparatus has been described that allows translation of a shared or common address to one of multiple local network addresses associated with multiple nodes even though TCP or UDP port numbers are not available. This is accomplished in some embodiments by accessing predetermined security information to perform the translation. In a packet containing ESP information, SPI values may be used. In a packet containing ISAKMP information, the initiator and responder cookies may be used. In one example, such a translation scheme may be employed to allow multiple IPSec nodes to “hide” behind a single IP address. In another example,

a virtual private network (VPN) may be set up to allow multiple VPN clients sharing a common network address to access a home or central network. Security can thus be employed to protect data communicated to nodes that sit behind a router including a network address translator for performing many-to-one address translation.

5 The various control units referred to in this description, such as the control unit 320 in Fig. 6, may include a microprocessor, a microcontroller, a processor card (including one or more microprocessors or controllers), or other control or computing devices. The storage units referred to in this description, such as the storage unit 322 in Fig. 6, may include one or more machine-readable storage media for storing data
10 and instructions. The storage media may include different forms of memory including semiconductor memory devices such as dynamic or static random access memories (DRAMs or SRAMs), erasable and programmable read-only memories (EPROMs), electrically erasable and programmable read-only memories (EEPROMs) and flash memories; magnetic disks such as fixed, floppy and removable disks; other
15 magnetic media including tape; and optical media such as compact discs (CDs) or digital video discs (DVDs). Instructions that make up the various software routines, modules, or functions in the various network entities (such as the routers) may be stored in respective storage units. The instructions when executed by a respective control unit cause the corresponding network entity to perform programmed acts.

20 The instructions of the software routines or modules may be loaded or transported into the network entity in one of many different ways. For example, code segments including instructions stored on floppy disks, CD or DVD media, a hard disk, or transported through a network interface card, modem, or other interface device may be loaded into the system and executed as corresponding software
25 routines or modules. In the loading or transport process, data signals that are embodied in carrier waves (transmitted over telephone lines, network lines, wireless links, cables, and the like) may communicate the code segments, including instructions, to the network entity. Such carrier waves may be in the form of electrical, optical, acoustical, electromagnetic, or other types of signals.

30 While the invention has been disclosed with respect to a limited number of embodiments, those skilled in the art will appreciate numerous modifications and variations therefrom. It is intended that the appended claims cover all such modifications and variations as fall within the true spirit and scope of the invention.

What is claimed is:

1 1. A method of routing a data unit targeted to one of a plurality of entities
2 in a network, comprising:
3 receiving the data unit, the data unit including security information and
4 address information; and
5 translating the address information to an address of a target network
6 entity based on the security information.

1 2. The method of claim 1, wherein the address information in the data
2 unit includes a common address associated with the plurality of network entities, and
3 each network entity is assigned a unique network address, and wherein translating the
4 address information includes translating the common address to one of the unique
5 network addresses.

1 3. The method of claim 1, wherein receiving the data unit includes
2 receiving an Internet Protocol packet.

1 4. The method of claim 3, wherein translating the address information
2 includes translating an Internet Protocol destination address.

1 5. The method of claim 3, wherein receiving the data unit includes
2 receiving a packet including Encapsulating Security Payload information.

1 6. The method of claim 5, wherein translating the address information
2 includes translating the address information based on a Security Parameters Index
3 field of the Encapsulating Security Payload information.

1 7. The method of claim 3, wherein receiving the data unit includes
2 receiving a packet including Internet Security Association and Key Management
3 Protocol information.

1 8. The method of claim 7, wherein translating the address information
2 includes translating the address information based on initiator and responder cookies
3 of the Internet Security Association and Key Management Protocol information.

1 9. The method of claim 1, further comprising creating one or more
2 address translation tables used in the translation of address information, the one or
3 more address translation tables each containing the address of at least one of the
4 network entities and security information associated with the at least one network
5 entity.

1 10. The method of claim 9, further comprising matching the security
2 information in the data unit with the information in the one or more address
3 translation tables.

1 11. A router for use in a network having one or more entities, the router
2 comprising:
3 an interface adapted to receive a data unit, the data unit containing a
4 field having security information; and
5 a translator adapted to generate an identifier of a network entity that
6 the data unit is targeted for based on the security information.

1 12. The router of claim 11, wherein the translator includes a many-to-one
2 network address translator.

1 13. The router of claim 11, wherein the data unit further contains an
2 address associated with the router.

1 14. The router of claim 13, wherein the translator is adapted to further
2 replace the address with the identifier of the target network entity.

1 15. The router of claim 11, wherein the data unit includes an Internet
2 Protocol packet.

1 16. The router of claim 15, wherein the data unit contains a Security
2 Parameters Index field in an Encapsulating Security Payload header.

1 17. The router of claim 15, wherein the data unit contains initiator and
2 responder cookies in an Internet Security Association and Key Management Protocol
3 header.

1 18. The router of claim 11, further comprising a storage medium storing
2 one or more tables containing routing information accessible by the translator.

1 19. The router of claim 18, wherein the routing information includes
2 security information and a corresponding identifier of a network entity.

1 20. An article including one or more machine-readable storage media
2 containing instructions for routing a data unit targeted to an entity on a network, the
3 instructions when executed causing a system to:
4 receive the data unit, the data unit containing security information to
5 provide secure communications of the data unit; and
6 determine an address of the network entity based on the security
7 information.

1 21. The article of claim 20, wherein the one or more machine-readable
2 storage media contain instructions that when executed causes the system to translate
3 an address in the data unit to the address of the network entity based on the security
4 information.

1 22. The article of claim 21, wherein the one or more machine-readable
2 storage media contain instructions that when executed causes the system to translate
3 the address based on Encapsulating Payload Security information.

1 23. The article of claim 21, wherein the one or more machine-readable
2 storage media contain instructions that when executed causes the system to translate
3 the address based on Internet Security Association and Key Management Protocol
4 information.

1 24. The article of claim 20, wherein the one or more machine-readable
2 storage media contain instructions that when executed causes the system to access an

3 address translation table to match the security information in the data unit to
4 information in the address translation table.

1 25. The article of claim 24, wherein the one or more machine-readable
2 storage media contain instructions that when executed causes the system to match
3 address and security information in the data unit with address and security
4 information in the address translation table.

1 26. A data signal embodied in a carrier wave comprising one or more code
2 segments containing instructions for routing a data unit to one of a plurality of
3 network entities, the instructions when executed causing a system to:
4 receive the data unit having security information and a destination
5 address;
6 access one or more translation tables each containing security
7 information and an address of a network entity; and
8 convert the destination address of the data unit to the network entity
9 address.

1 27. A storage medium containing a data structure accessible by a system
2 for routing a data unit to an entity in a network, the data unit containing a first
3 destination address and the network entity having a second address, the data structure
4 comprising the first destination address, the second address, and security information
5 useable by the system to match the first destination address to the second address
6 based on the security information.

1 28. A communications network, comprising:
2 a first network including a plurality of entities and a router, the router
3 including a network address translator; and
4 a node capable of communicating data units with entities in the first
5 network, each data unit including security information,
6 the network address translator adapted to convert a destination address
7 in a received data unit from the node to an address of one of the entities based on the
8 security information in the received data unit.

ABSTRACT OF THE DISCLOSURE

A communications system includes a first network that includes a plurality of entities and a router. The router includes a network address translator. A node is capable of communicating data units with entities in the first network. Each data unit includes security information, such as information according to the Internet Security Association and Key Management protocol (ISAKMP) and the Encapsulating Security Payload (ESP) protocol. The network address translator is adapted to convert a destination address in a received data unit from the node to an address of one of the entities based on the security information in the received data unit.

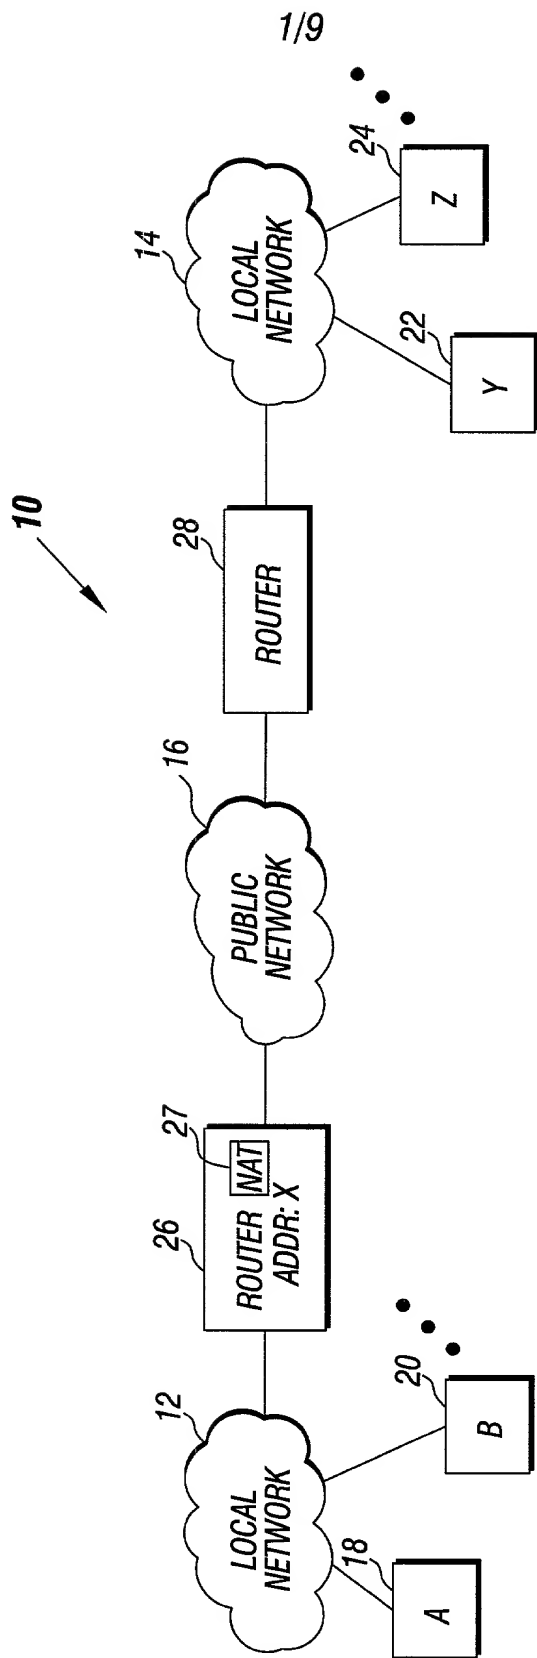


FIG. 1

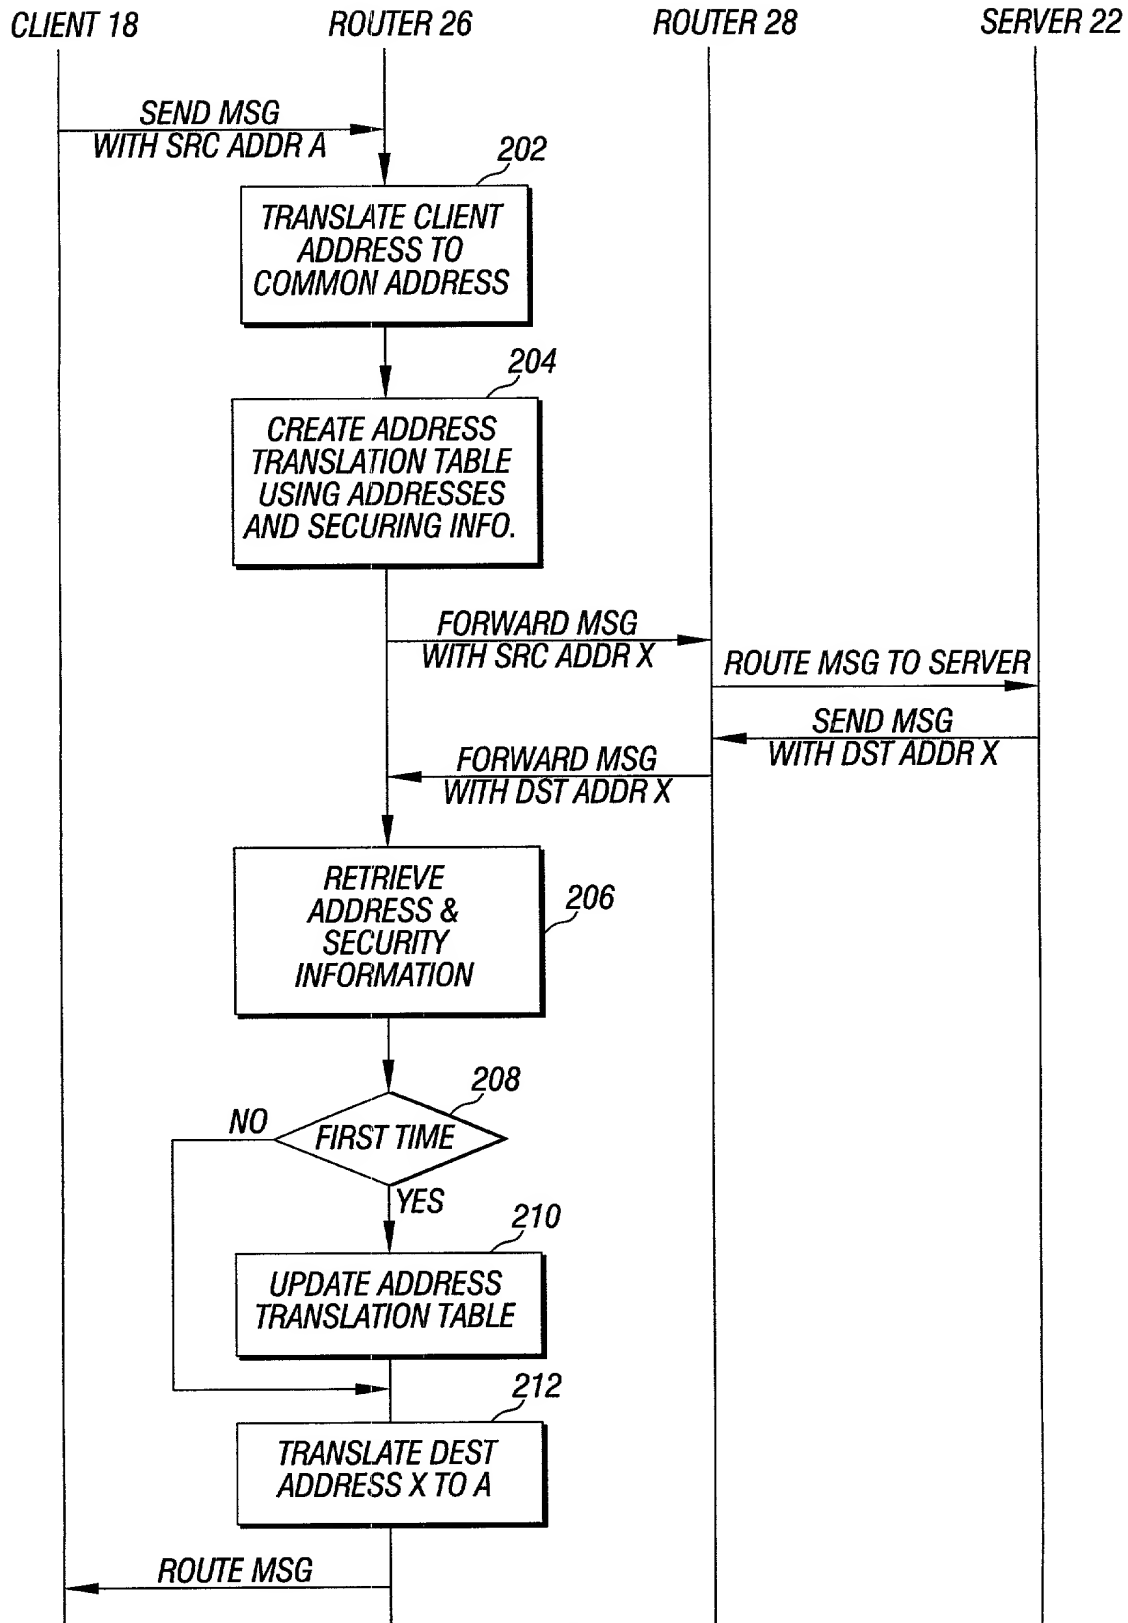


FIG. 2

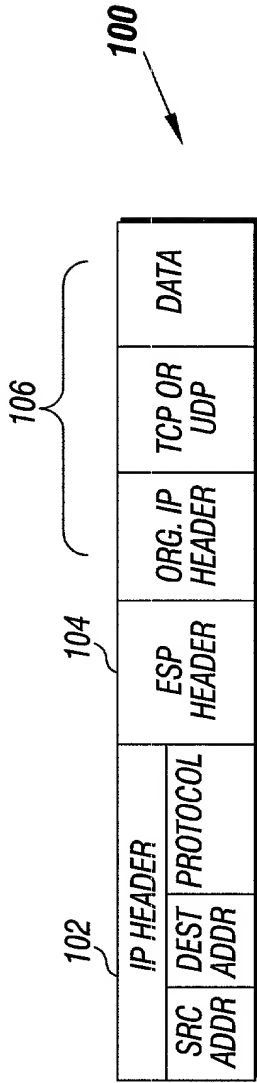


FIG. 3A

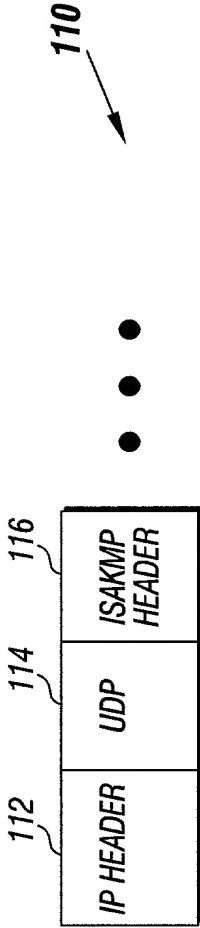


FIG. 3B

104

SECURITY PARAMETERS INDEX (SPI)	
SEQUENCE NUMBER	
PAYLOAD DATA * (VARIABLE)	
PADDING (0-255 BYTES)	
PAD LENGTH	NEXT HEADER
AUTHENTICATION DATA (VARIABLE)	

FIG. 4

116

INITIATOR COOKIE				
RESPONDER COOKIE				
NEXT PAYLOAD	MJVER	MNVER	EXCHANGE TYPE	FLAGS
MESSAGE ID				
LENGTH				

FIG. 5

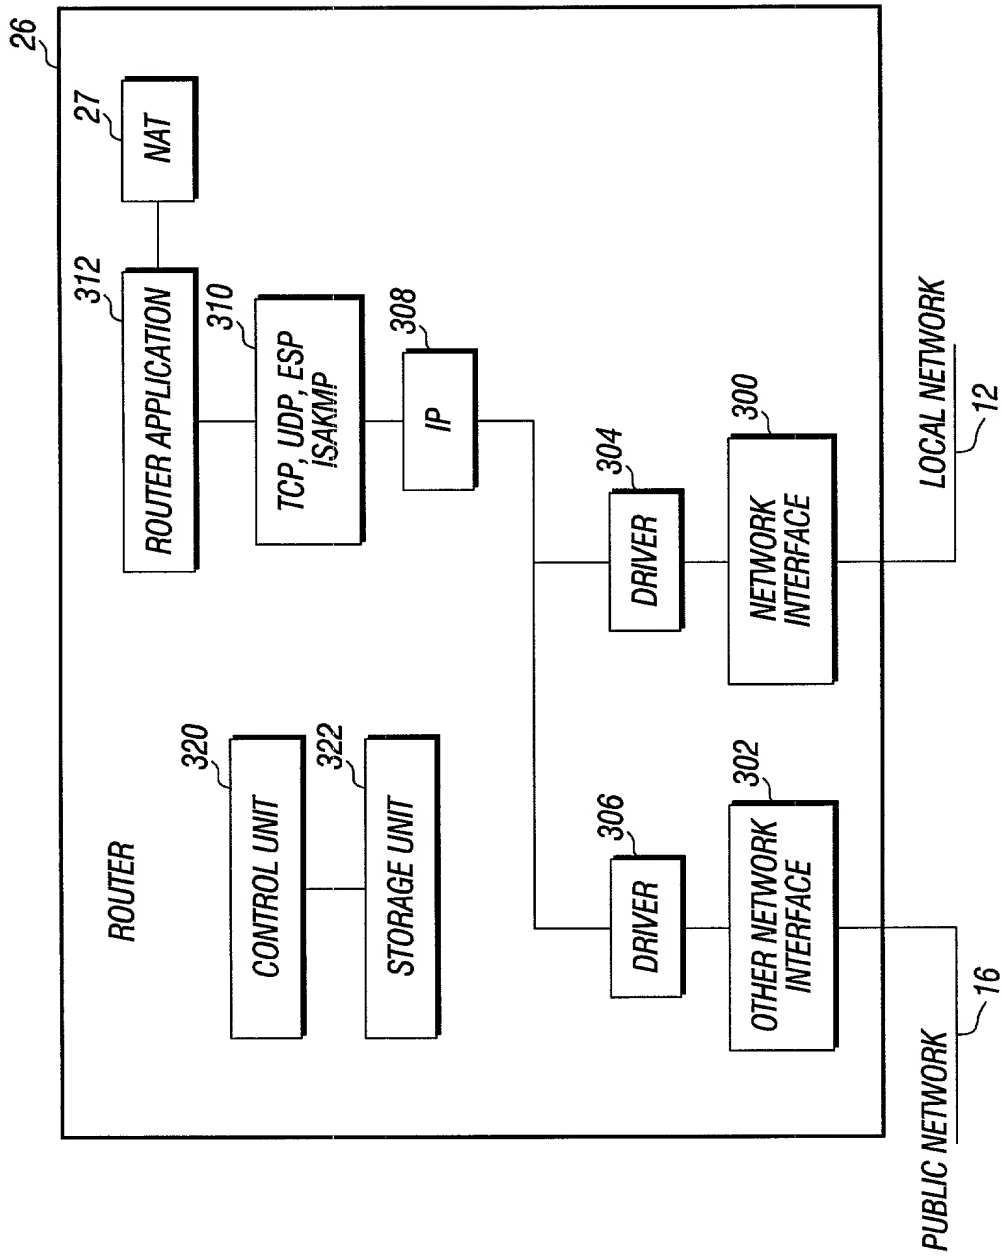


FIG. 6

<i>SRC ADDR</i>	<i>DEST ADDR</i>	<i>SRC PORT</i>	<i>DEST PORT</i>	<i>INITIATOR COOKIE</i>	<i>RESPONDER COOKIE</i>
---------------------	----------------------	---------------------	----------------------	-----------------------------	-----------------------------

*CLIENT
TO
ROUTER*

<i>A</i>	<i>Y</i>	<i>500</i>	<i>500</i>	<i>IC</i>	<i>0</i>
----------	----------	------------	------------	-----------	----------

FIG. 7A

*ROUTER
TO
SERVER*

<i>X</i>	<i>Y</i>	<i>500</i>	<i>500</i>	<i>IC</i>	<i>0</i>
----------	----------	------------	------------	-----------	----------

FIG. 7B

*SERVER
TO
ROUTER*

<i>Y</i>	<i>X</i>	<i>500</i>	<i>500</i>	<i>IC</i>	<i>RC</i>
----------	----------	------------	------------	-----------	-----------

FIG. 7C

*ROUTER
TO
CLIENT*

<i>Y</i>	<i>A</i>	<i>500</i>	<i>500</i>	<i>IC</i>	<i>RC</i>
----------	----------	------------	------------	-----------	-----------

FIG. 7D

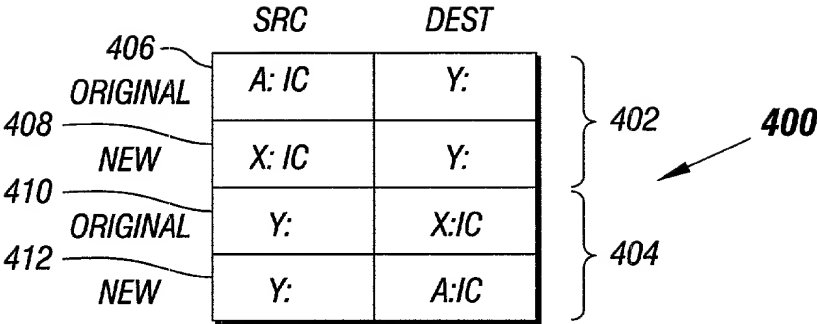


FIG. 8A

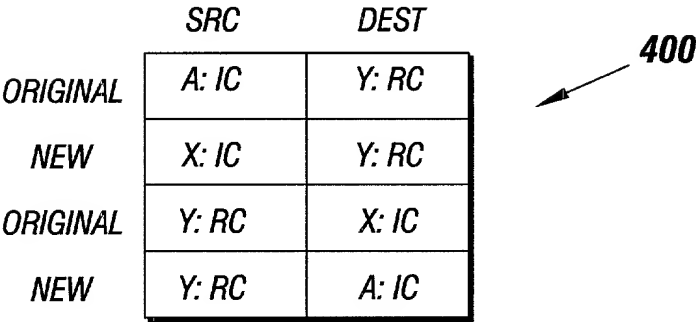


FIG. 8B

<i>SRC ADDR</i>	<i>DEST ADDR</i>	<i>SPI</i>
---------------------	----------------------	------------

*CLIENT
TO
ROUTER*

<i>A</i>	<i>Y</i>	<i>Sy</i>
----------	----------	-----------

FIG. 9A

*ROUTER
TO
SERVER*

<i>X</i>	<i>Y</i>	<i>Sy</i>
----------	----------	-----------

FIG. 9B

*SERVER
TO
ROUTER*

<i>Y</i>	<i>X</i>	<i>Sa</i>
----------	----------	-----------

FIG. 9C

*ROUTER
TO
CLIENT*

<i>Y</i>	<i>A</i>	<i>Sa</i>
----------	----------	-----------

FIG. 9D

100

100

100

100

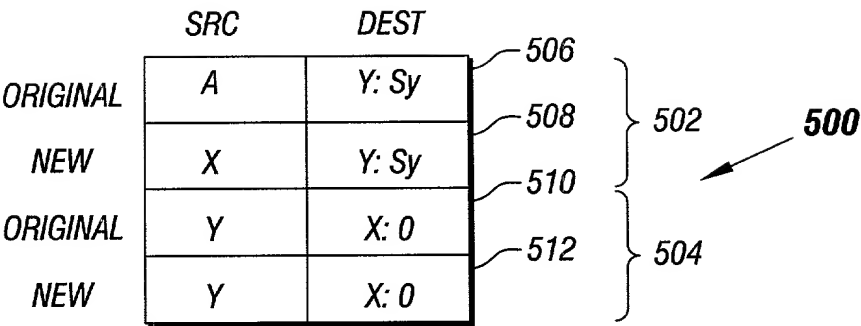


FIG. 10A

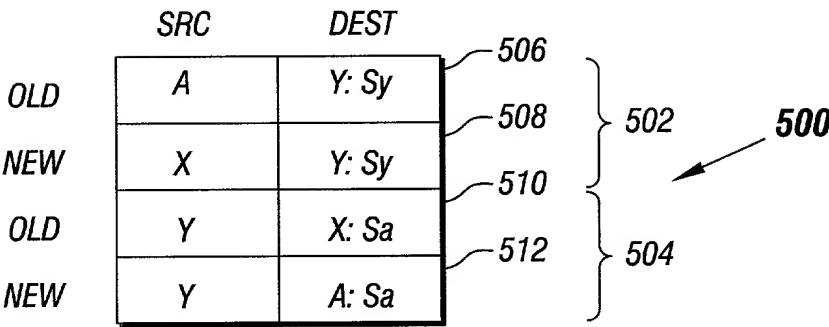


FIG. 10B

Attorney's Docket No.: NORT-0030-US (11478BAUS01U)PATENTDECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

ROUTING DATA TO ONE OR MORE ENTITIES IN A NETWORK

the specification of which

X	is attached hereto.
	was filed on _____ as
	United States Application Number _____
	or PCT International Application Number _____
	and was amended on _____
	(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claim(s), as amended by any amendment referred to above. I do not know and do not believe that the claimed invention was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof or more than one year prior to this application, that the same was not in public use or on sale in the United States of America more than one year prior to this application, and that the invention has not been patented or made the subject of an inventor's certificate Issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months (for a utility patent application) or six months (for a design patent application) prior to this application.

I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119(a)-(d), of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):Priority Claimed

<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>
<u>Number</u>	<u>(Country)</u>	<u>(Day/Month/Year Filed)</u>	<u>Yes</u>	<u>No</u>

I hereby claim the benefit under title 35, United States Code, Section 119(e) of the United States provisional application(s) listed below:

<u>(Application Number)</u>	<u>(Filing Date)</u>
<u>(Application Number)</u>	<u>(Filing Date)</u>



I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application:

<u>(Application Number)</u>	<u>Filing Date</u>	<u>(Status-patented, pending, abandoned)</u>
-----------------------------	--------------------	--

I hereby appoint Timothy N. Trop, Reg. No. 28,994; Fred G. Pruner, Jr., Reg. No. 40,779, Dan C. Hu, Reg. No. 40,025; Coe F. Miles, Reg. No. 38,559, and John R. Merkling, Reg. No. 31,716 my patent attorneys, of TROP, PRUNER, HU & MILES, P.C., with offices located at 8554 Katy Freeway, Ste. 100, Houston, TX 77024, telephone (713) 468-8880, and John D. Crane, Reg. No. 25,231; W. Glen Johnson, Reg. No. 39,525; Paul W. Fulbright, Reg. No. 38,145; Richard A. Weiss, Reg. No. 35,734; Vernon E. Williams, Reg. No. 38,713; my patent attorneys, of Nortel Networks Corporation; with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith.

Send correspondence to Dan C. Hu, TROP, PRUNER, HU & MILES, P.C., 8554 Katy Freeway, Ste. 100, Houston, TX 77024 and direct telephone calls to Dan C. Hu, (713) 468-8880.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole/First Inventor: Lewis T. Donzis	
Inventor's Signature: 	Date: 12/17/99
Residence: 13 Aspen Creek, San Antonio, TX 78248	Citizenship: U.S.A.
Post Office Address: 13 Aspen Creek, San Antonio, TX 78248	
Full Name of Second/Joint Inventor: Earnest E. Hughes	
Inventor's Signature: 	Date: 12/17/99
Residence: 2907 Sky Cliff, San Antonio, TX 78231	Citizenship: U.S.A.
Post Office Address: 2907 Sky Cliff, San Antonio, TX 78231	